

# Mecca


## Basin/Bath Spout Only

### 120/160/185/230/260MM

Nero




Lead Free

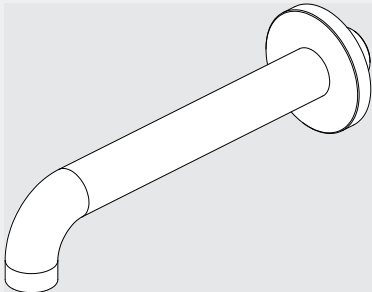

Version: 202605

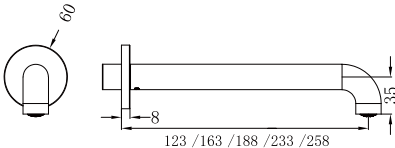

| Drawing                                                                                                                                                                    | Specifications                                            | Packaging Includes                                                                  |                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|
|                                                                                          | <b>Watermark License</b><br>WM-060073                     | 1x Spout<br>1x Plate<br>1x Non-Restricting Aerator                                  |                                                           |
|                                                                                                                                                                            | <b>Temperature Rating</b><br>Min 1°C-Max 75°C             |                                                                                     |                                                           |
|                                                                                                                                                                            | <b>Pressure Rating</b><br>Min 150kpa - Max 500kpa         |                                                                                     |                                                           |
| <b>Finish &amp; SKU</b>                                                                                                                                                    |                                                           |                                                                                     |                                                           |
|                                                                                         | <b>Chrome</b><br>NR221903c(120/160/185/230/260)CH         |  | <b>Gun Metal</b><br>NR221903c(120/160/185/230/260)GM      |
|                                                                                         | <b>Matte Black</b><br>NR221903c(120/160/185/230/260)MB    |  | <b>Brushed Gold</b><br>NR221903c(120/160/185/230/260)BG   |
|                                                                                         | <b>Brushed Bronze</b><br>NR221903c(120/160/185/230/260)BZ |  | <b>Brushed Nickel</b><br>NR221903c(120/160/185/230/260)BN |
|                                                                                         | <b>Matte White</b><br>NR221903c(120/160/185/230/260)MW    |                                                                                     |                                                           |
| <p>Note: Spout length corresponds to SKU:<br/>120MM → NR221903c120<br/>160MM → NR221903c160<br/>185MM → NR221903c185<br/>230MM → NR221903c230<br/>260MM → NR221903c260</p> |                                                           |                                                                                     |                                                           |
| <p>*Dimensions are nominal measurements only<br/>**Includes an additional non-restricting aerator for bath use</p>                                                         |                                                           |                                                                                     |                                                           |

## Installation Instructions

### GENERAL INSTRUCTIONS

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.


### Important

#### After Tiling – Installation

Steps as shown. (Including the D to be installed  $\geq 20$  )

#### Before Tiling – Installation


Steps as shown.




## After Tiling – Installation



1. Trim the G1/2 outlet thread to be flush with the finished wall surface.



2. Remove the G1/2 spout adapter from the spout.  
Attach the G1/2 spout adapter to the outlet thread, ensuring that the rubber washer is properly seated inside the adapter as illustrated in the figure.



3. Fit the back plate onto the spout adapter.  
4. Place the ABS washer against the back plate.  
5. Push the spout onto the spout adapter.


## MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

## FINAL INSPECTION:


- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

## Before Tiling – Installation




1. Drill a Ø30-Ø40 hole through the plasterboard for the G1/2 outlet thread.


2. Trim the G1/2 outlet thread so that it protrudes the plasterboard 7-9.5mm.



3. Apply the filter gasket to the inlet thread and then connect the inlet and outlet thread. Attach the G1/2 spout adapter to the outlet thread, ensuring that the rubber washer is properly seated inside the adapter as illustrated in the figure.




4. Apply waterproof to the plasterboard surface and the gap between the plasterboard and the inlet thread.

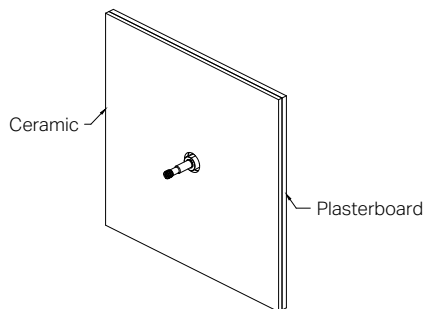


5. Drill a Ø30-Ø40 hole through the ceramic according to the position of the inlet.

6. Install the ceramic.



7. Apply the waterproof to the gap between the inlet thread and the ceramic .



8. Apply the plate to the inlet and then install the wear ring to the ceramic surface.

9. Install the spout to the inlet thread and tighten it with grub screws using the Allen key.

## MAINTENANCE AND CARE

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

## FINAL INSPECTION

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero

