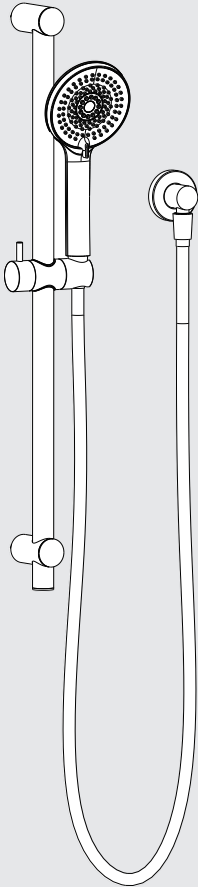


Round Metal Project Rail Shower

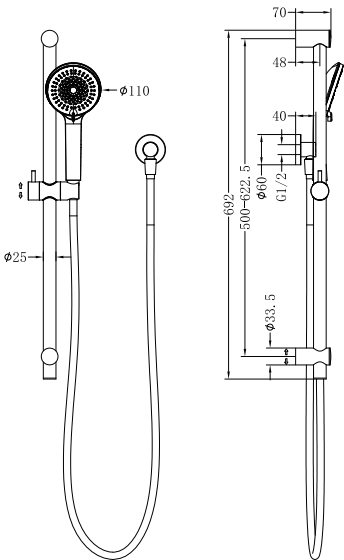
Nero



Versions:202506



Drawing



Specifications

Watermark License
WM-060093
Temperature Rating
Min 1°C-Max 75°C
Pressure Rating
Min 150kpa - Max 500kpa

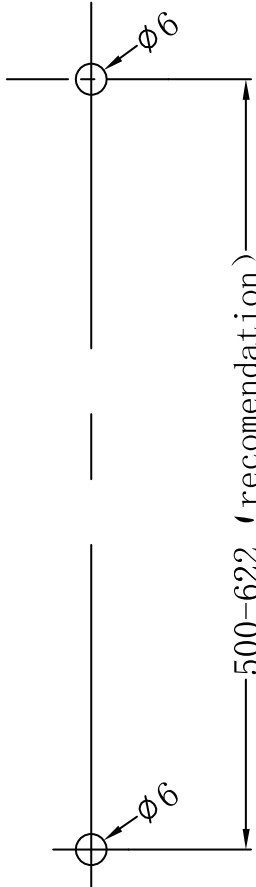


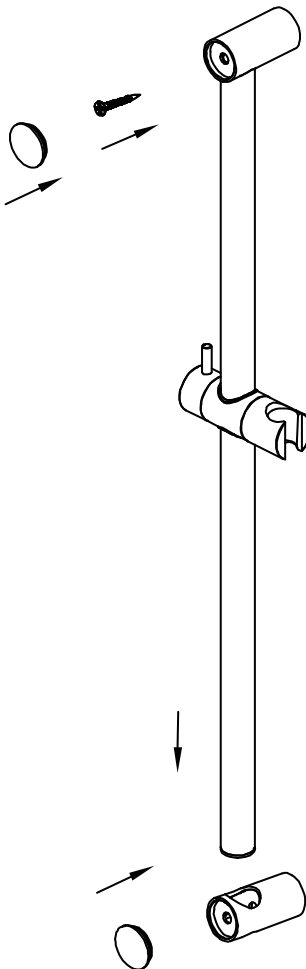
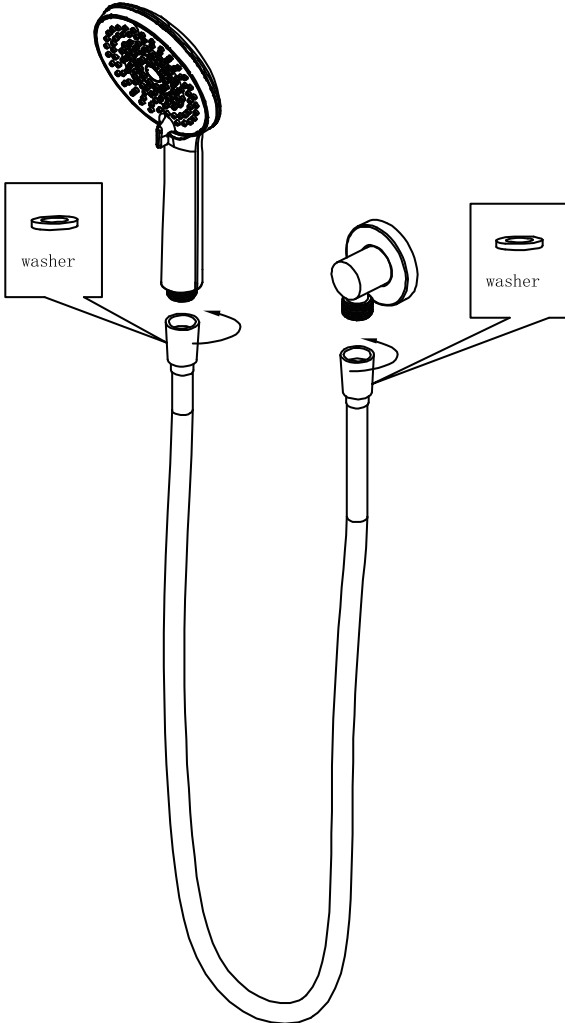
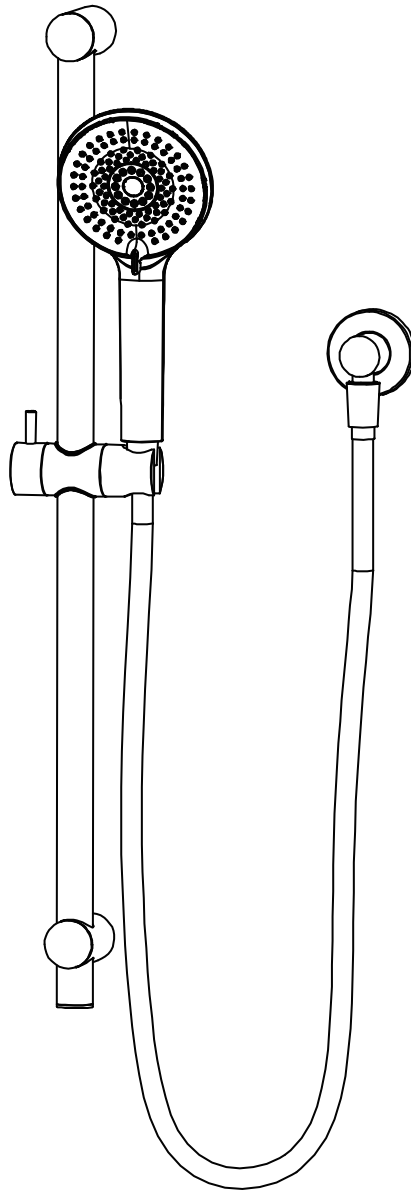
Packaging Includes

- 1x Handle Shower (Built-In Check Valve)
- 1x Shower Hose
- 1x Elbow
- 1x Shower Rail

Finish & SKU

- | | | |
|-------------------------------|--------------------------------|----------------------------------|
| Chrome
NR318CH | Gun Metal
NR318GM | Brushed Nickel
NR318BN |
| Matte Black
NR318MB | Brushed Gold
NR318BG | |

*Dimensions are nominal measurements only.

use Teflon tape  1.Put Teflon tape on outlet thread.	 4.Drill two $\phi 6$mm holes according to above picture.	 5. Mount bottom bracket on the $\phi 6$ hole by expansion plug and tapping screw.
 2.Pull dressing ring on the elbow body.		 3. Screw elbow body on to outlet.
 6.Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw. Push plates onto two brackets.		
 7.Connect hand shower with outlet by shower hose		
 8.Test for leaks.		

Nero

